



FLUXA

Fluxa
Filtri
S.p.A.

V.le A. De Gasperi, 88/B-20017 Mazzo di Rho (MI)
Tel. 0293959.1 (15 linee)
Fax 02.93959.400/440/470
e-mail: info@fluxafiltri.com - www.fluxafiltri.com

PLEATED DEPTH MEDIA FILTER CAPSULES

Poliflo II pleated depth media capsules are fully disposable filter units for small and medium scale liquid and gas processing applications. They are ready-to-use, avoiding the need to purchase or maintain filter housing and are easy to change-out with minimum downtime. The filtration unit is permanently enclosed inside the capsule shell to minimise post-use cleaning and operator exposure to process fluids.

Poliflo II Capsules are available with pleated polypropylene or Borosilicate Glass microfibre media and offered with a range of inlet/outlet connections to suit most process systems. The filters are supplied in a wide range of lengths from 50 mm to 750 mm long.

Poliflo II CP Capsule

- 100% polypropylene construction
- Absolute removal rating
- Wide chemical compatibility

Poliflo II CF Capsule

- Borosilicate Glass Microfibre media
- 100% polypropylene hardware
- Available absolute removal ratings
- Wide chemical compatibility

Product Features

- Thermally bonded and adhesive free construction
- Capsules are non-pyrogenic and can be autoclaved
- Materials meet US FDA CFR Title 21 requirements
- Available in a range of grades and pore size
- Manufactured in clean room facilities under ISO quality system



POLIFLO II CAPSULES FEATURES AND BENEFITS

- Fully disposable unit avoids the need to purchase a filter housing
- Ready to use for easy filter change-out and minimum downtime
- Enclosed filter unit minimises operator exposure and post-use cleaning
- Wide range of inlet and outlet connections available so suitable for most process systems
- All polymer construction
- Full product validation guide available

INDUSTRIES AND APPLICATIONS

- Development and pilot plant applications
- Equipment requiring filtration e.g. laboratory water treatment systems, printing equipment, etc
- Hospital critical water applications e.g. endoscope washing machines, dialysis equipment
- Venting and process air filtration
- Manufacturers of small or medium size batches of products where batch to batch cleaning is an issue
- Multi-purpose plants where flexibility is needed

TECHNICAL DATA

Dimensions

Outside Diameter: 90 mm

Filter Module Length	Nominal Capsule Length (Hose Barb connections)	Nominal Media Surface Area	Capsule Volume (Litres)
50 mm (2")	127 mm	0.09 m ²	0.23
125 mm (5")	220 mm	0.26 m ²	0.57
250 mm (10")	339 mm	0.54 m ²	1.0
500 mm (20")	582 mm	1.08 m ²	1.9
750 mm (30")	824 mm	1.62 m ²	2.8

Sterilisation and Sanitisation

Autoclave: 127°C for 20 mins (multiple cycles)
 Hot Water: Up to 90°C

Maximum Operating Conditions



Maximum Temperature: 43°C @ 2.0 Bar
 Maximum Pressure: 5.5 Bar @ 20°C (liquid)
 4.1 Bar @ 20°C (Gas)
 Max Differential Pressure: 3.4 Bar @ 20°C Forward Flow
 2.7 Bar @ 20°C Reverse Flow

Materials of Construction

Filter media: P - Polypropylene or
 F - Borosilicate Glass Microfibre
 Media support: Polypropylene
 Capsule Assembly: Polypropylene
 Vent and Drain Valves: Polypropylene Luer-lok

Product validation guide available on request. All **Poliflo II Capsules** are manufactured under strict control with batch number identification, giving full traceability on all components.

Flow Rates For Water (2" Capsule)

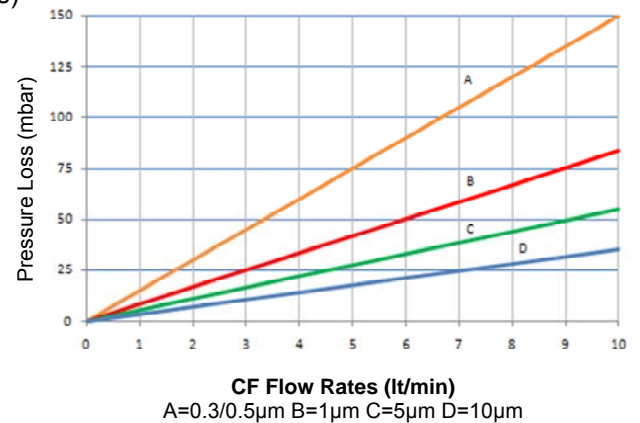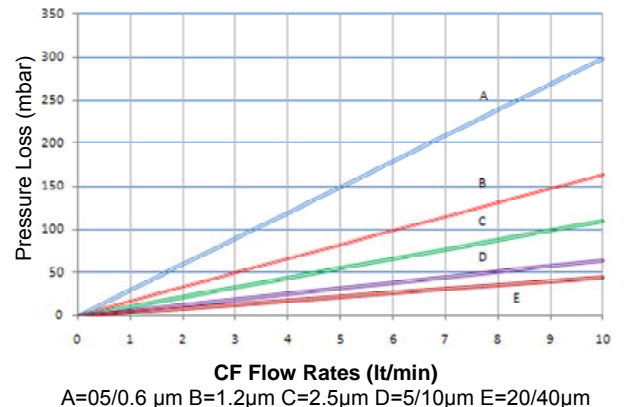

ORDERING GUIDE

C — ○ G — ○ ○ — ○ ○ ○ — ○ ○

Media	Length	Micron Rating	Inlet	Outlet	Option
P - Polypropylene	02 - 127 mm	FP	A - 8.5 - 16 mm	A - 8.5 - 16 mm	
F - Borosilicate	05 - 220	003 - 0.03 µm	Hosebarb	Hosebarb	
Glass Microfibre	09 - 339	005 - 0.5	B - 1/4" NPT 'M'	B - 1/4" NPT 'M'	
	20 - 582	010 - 1.0	C - 1/4" NPT 'F'	C - 1/4" NPT 'F'	
	30 - 824	050 - 5.0	D - 3/8" NPT 'F'	D - 3/8" NPT 'F'	
		100 - 10	E - 1/2" NPT 'M'	E - 1/2" NPT 'M'	
		PP	F - 1/2" NPT 'F'	F - 1/2" NPT 'F'	
		005 - 0.5 µm	G - 1/1 1/2" Sanitary	G - 1/1 1/2" Sanitary	
		006 - 0.6	Flange	Flange	
		012 - 1.2			
		025 - 2.5			
		050 - 5.0			
		100 - 10			
		200 - 20			
		400 - 40			

Example: C-PG20 - 012 - GA = Polypropylene media, 1.2 µm, 20" long, Sanitary Flange inlet and Hosebarb outlet.